



Specifications:

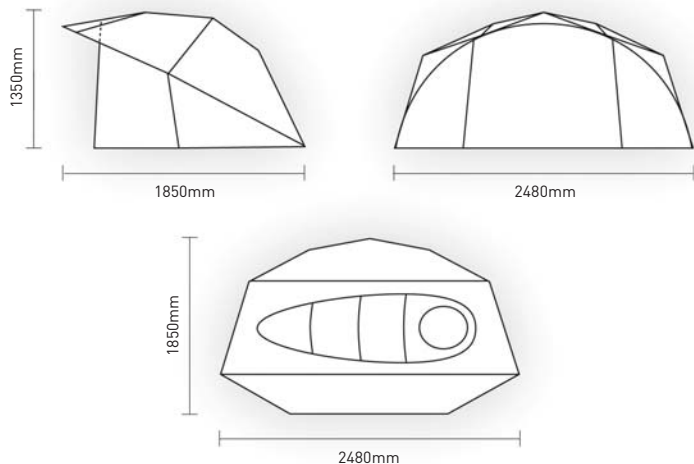

Contents:

Broolly x 1 | Centre pole x 1 | Blanking cap x 1 | Infill panel x 1 | Pegs x 1
Guy rope x 1 | Clear window x 1 | Heavy duty outer bag x 1
Ground sheet x 1 | Storm rods x 4 | Instruction booklet x 1

Aqua Products Unit 2 Lower Healey Business Park
Froom Street Chorley Lancashire PR6 9AR
Hotline 0845 1259399 Email sales@aquaproducts.co.uk
www.aquaproducts.co.uk

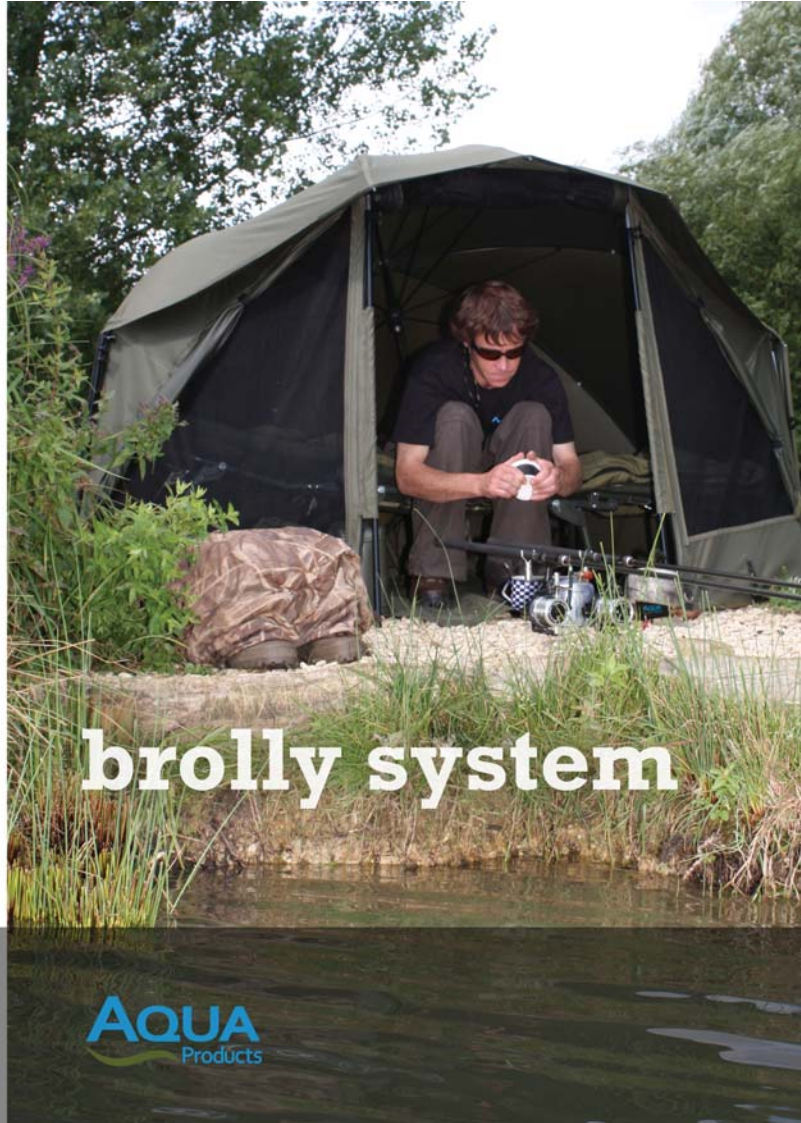

broolly system

AQUA
Products

Brolly System

Assembly Instructions

Please take the time to read these basic instructions carefully before assembling your new Brolly for the first time.

It is advisable that the first time you use the brolly it is pitched at home in your garden to familiarise yourself with your new purchase.

Take care to find a suitable location in which to pitch your brolly. Take into consideration factors such as the contours of the ground, sharp objects underfoot that could damage the ground sheet and the direction of any strong winds.

Lay out the ground sheet on the floor where you wish to erect your brolly.

A small Aqua label indicates the doorway and as such is best positioned with the wind coming from behind as this greatly increases stability in high winds.

Open the brolly and slide the central sliding handle up the centre pole firmly until it clicks, please ensure that the green button has located correctly before releasing the pressure.

Unscrew the centre pole by turning in an anti clockwise direction and attach the blanking cap (supplied) in its place.

Standing at the front of the brolly attach the two short storm rods onto the brass storm caps located at the top of the mini storm side.

Place a peg at the base of each storm side and adjust the rod to ensure the storm side is taut.

Secure the storm rod in the tube to keep in place.

Now place a peg in each ring at the rear of the brolly.

If the front is to be used attach the two long storm rods to the remaining storm caps located either side of the centre rib at the front of the brolly.

Zip on the front infill taking care to align the zips correctly.

Once attached with the door closed, place a peg on the centre pegging point either side of the door then adjust the storm rods to take up the tension and secure the storm rods inside the tubes.

Now place a peg in the remaining rings to ensure the front is taut.

Please note that an open fronted brolly can be easily damaged in strong head winds it is therefore advisable to consider this when erecting your Aqua brolly, storm damage is not covered under the warranty. During inclement weather it is advisable to double peg each peg point (extra peg sets are available separately) and inserting the storm rods into the ground do not hammer as this may cause injury or damage to the brolly/storm rods. For strong winds there is also a guy rope ring situated on the bell cap.

Care and maintenance of your Brolly

All Aqua products will provide you with years of service providing it is well looked after. We recommend that the brolly is always packed away dry or is dried as soon as possible after a session. This prevents mildew from forming and in turn prevents damage to the materials used.

We recommend using Grangers cleaning agents to clean your brolly. Wash your brolly while erect using warm water.

Always dry thoroughly in the shade.

Do not use detergents to clean your brolly.

Never machine wash or tumble dry your brolly

Do not use any abrasive scrubbing agents/cloths.

Avoid contact with fuel, oil (in baits/Cooking) and chemicals as the stains from these may be impossible to remove and will probably attack the fabric and damage the proofing.

Avoid pitching under trees as sap may fall onto the outer and it is almost impossible to remove.

Over time the coating on the outside of the fabric will wear and the material will no longer form droplets on the fabric and run off easily. We recommend annually that you re-proof the material. The only product we recommend is Fabsil Gold by Grangers. It is available from all good camping and outdoor shops. Follow the Fabsil Gold instructions when you re-proof the brolly.

Condensation

All single skin bivvys / brollies are subject to condensation and is unavoidable at certain times of the year. The use of a ground sheet and avoiding cooking in the confines of your brolly will also reduce the effects of condensation.

Warranty

All Aqua Products are designed and manufactured to exacting standards and are guaranteed for the end purpose intended. Should the product fail during normal usage as a result of a component, material or manufacturing fault, excluding fair wear and tear, then the product will be repaired or replaced (with the same or a similar model from the current range) at our expense and discretion. All poles and fabric colour fading, due to over exposure to the sun are excluded from fair wear and tear.

This guarantee is only valid when used for recreational purposes, not including commercial usage i.e. hiring, use by outdoor centres etc. Repairs to damage caused by accident, use in inappropriate conditions, normal wear and tear will be carried out where possible at a reasonable charge. Please ensure that all products are clean and dry prior to being returned.

No consequential loss may be claimed under this guarantee. This guarantee in no way affects your statutory rights.

Repairs

We offer a comprehensive repair service whereby most repairs can be carried out on site by our team of trained machinists.

In the first instance please ensure that the brolly comes back to us in a clean dry condition. We do not have the facilities to dry tents here at Aqua and due to health and safety reasons we will not work on a soiled brolly.

Clearly mark on the brolly where the fault is using chalk/low tack tape. Please supply a detailed list of the faults, contents, contact numbers and return address details.

If it is a warranty claim please ensure you send proof of purchase (Direct Aqua customers only) if purchased through one of our premier retailers it must be returned to them.

Please ensure the brolly is packaged so as not to cause further damage and ensure the package is insured for the full value of the contents we cannot be held responsible for damage caused in transit or lost parcels.

All repairs unless under warranty will be quoted for before any work takes place and we aim to turn around repairs within 10 working days subject to parts/peak times etc.

No brolly is guaranteed against storm damage.

